

Purchase date : _____ Product Tracking Reference : _____



Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-866-839-2888, 9 a.m. – 5 p.m., EST, Monday – Friday.

TABLE OF CONTENTS

Package Contents.....3

Hardware Contents.....5

Safety Information.....6


Preparation.....6

Installation Instructions.....7

Maintenance.....14

Warranty.....14

PACKAGE CONTENTS

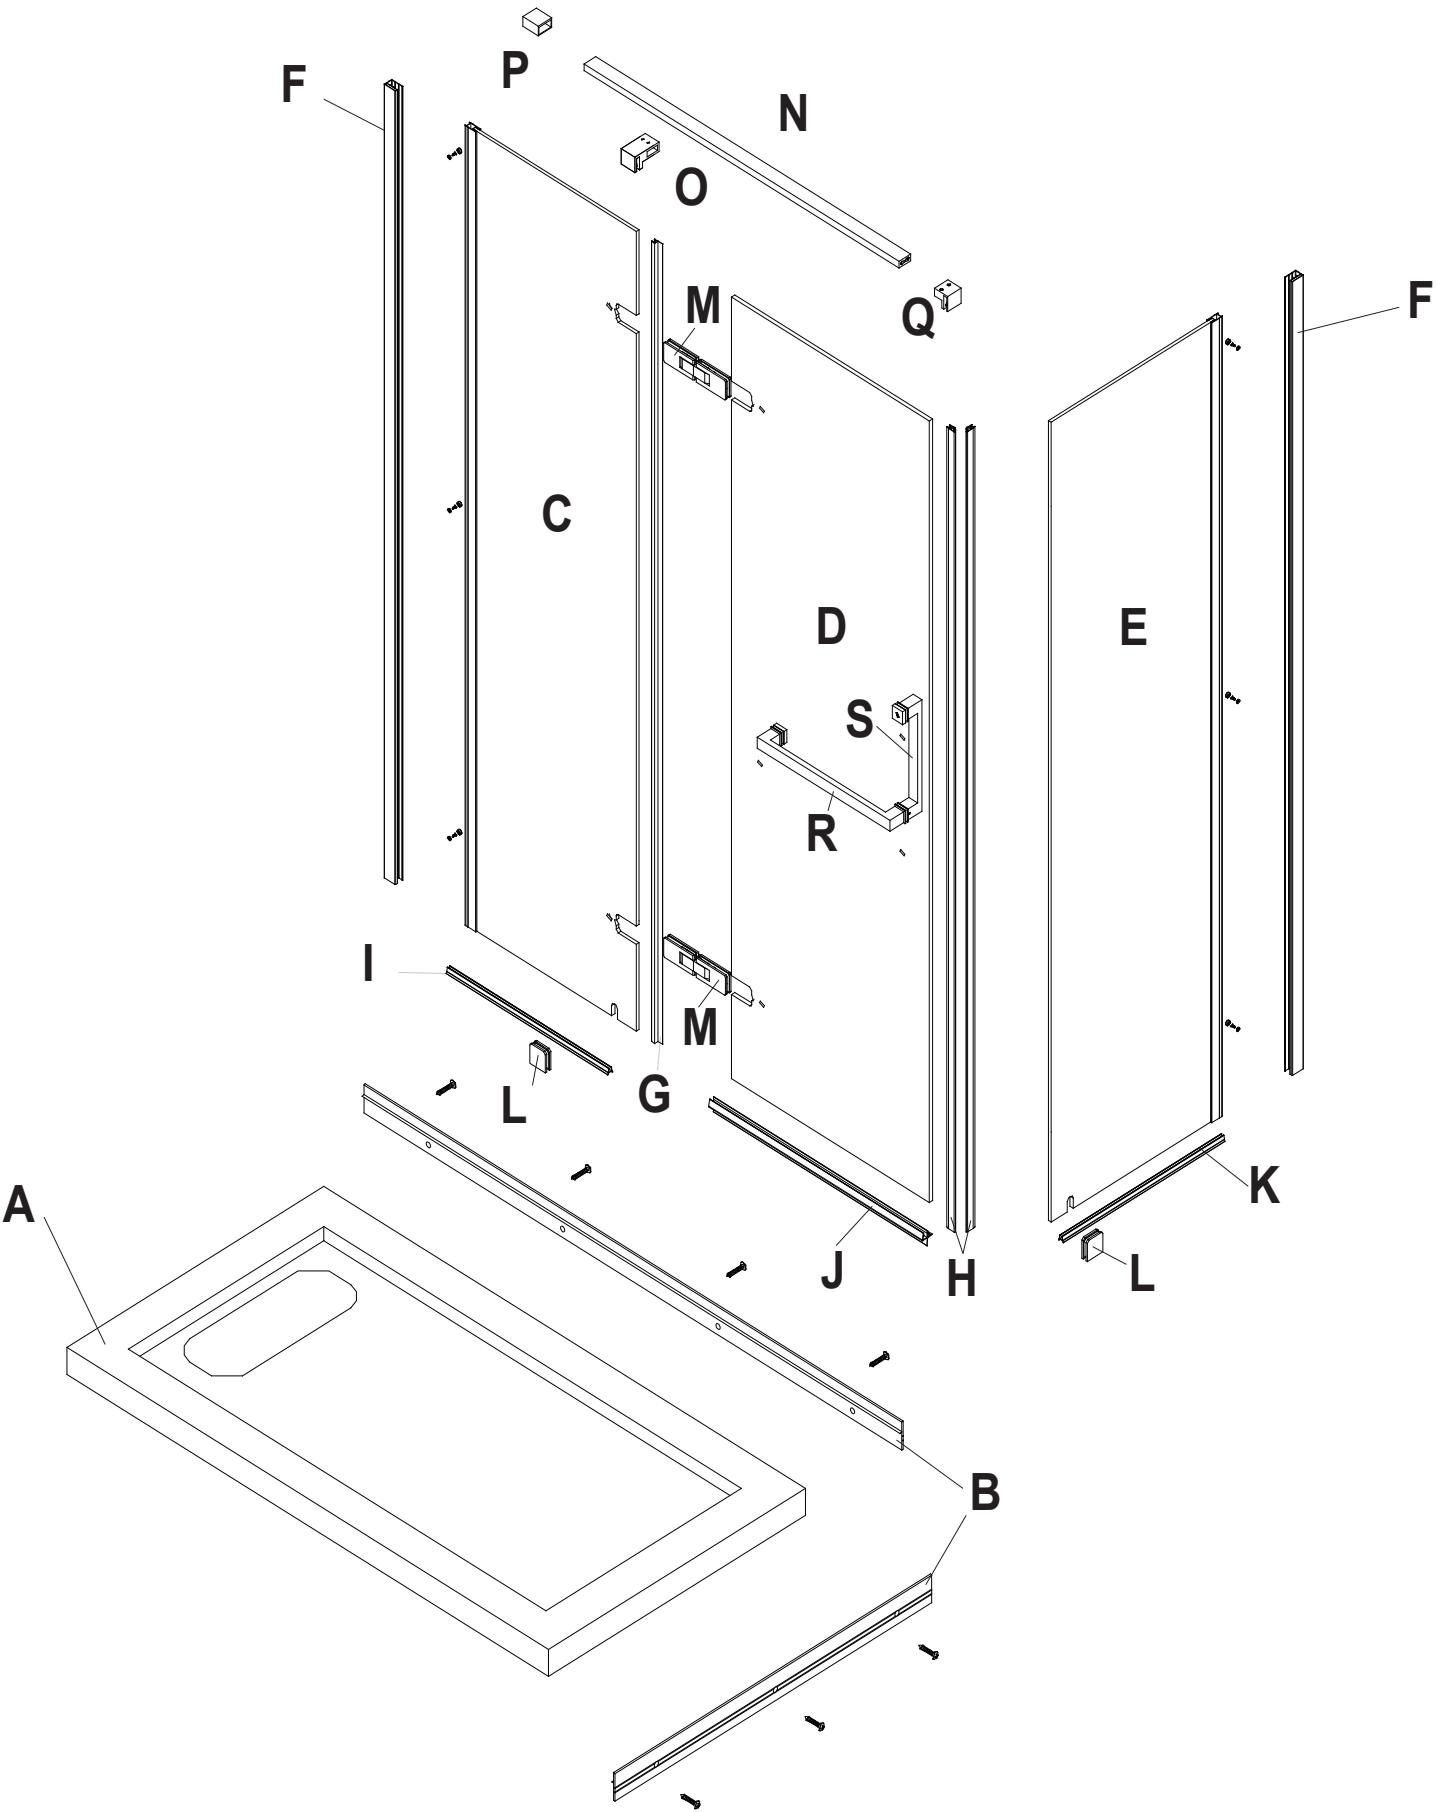


PACKAGE CONTENTS

| PART | DESCRIPTION | QUANTITY | CODE |
|------|------------------------|----------|--------------|
| A | Base | 1 | --- |
| B | Base flange | 2 | --- |
| C | Fixed glass panel | 1 | 99SG10315-WM |
| D | Shower door | 1 | 99SGD0014-WM |
| E | Side panel | 1 | 99SG20012-WM |
| F | Aluminum metal track | 2 | 99STR0025-WM |
| G | Vertical rubber track | 1 | 99SRU0006 |
| H | PVC magnetic door seal | 2 | 99SRU0021 |
| I | Rubber strip (Long) | 1 | 99SRU0033 |
| J | Bottom rubber track | 1 | 99SRU0009 |
| K | Rubber strip (Short) | 1 | 99SRU0003 |
| L | Glass support bracket | 2 | 99SGC0012-WM |
| M | Shower hinge | 2 | 99SHI0011-WM |
| N | Support bar | 1 | 99SGS0006-WM |
| O | Glass support bracket | 1 | 99SGC1031-WM |
| P | Wall bracket | 1 | 99SGC1025-WM |
| Q | Glass support bracket | 1 | 99SGC1030-WM |
| R | External handle | 1 | 99SHA1022-WM |
| S | Internal handle | 1 | |

HARDWARE CONTENTS

AA



Wall plug
ø6X30

Qty. 8

BB



Screw
ST4X30

Qty. 8


CC



Screw
ST4X15

Qty. 6

DD



Brass cap &
fitting

Qty. 6

EE



Screw
ST4X20

Qty. 2


HH



Screw
ST5X35

Qty. 2


II



Wall plug
ø8X30

Qty. 2


JJ



Allen key
2.5 mm

Qty. 1


KK



Allen key
4 mm

Qty. 1


LL



Large cap

Qty. 4

MM



Small cap

Qty. 8



SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

- Handle the tempered glass with caution! Improperly handling the glass can cause it to break suddenly in small pieces (never in pointed fragments).
- You will need at least two people to install this unit properly.



WARNING

- OVE is not responsible for any damage to the unit or personal property caused by improper installation. If you disregard instructional warnings, you will void your warranty and possibly deal with water damage.



CAUTION

- Carefully remove product from packaging and keep packaging until installation is complete.
- Inspect all parts for damage; if there is damage to the unit prior to installation, please contact your distributor.
- Install the shower on a floor that is level and able to accommodate the weight of the unit and an occupant.
- Please, consult local building codes and compliance standards prior to installation and ensure conformity.

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: Shower tray (60 min), glass panels (60min).

Tools Required for Assembly (not included):

Screwdriver, Drill, 1/16" & 1/8" Drill bits, Silicone, Rubber mallet, Tape measure, Level, Adjustable tool, Pencil, Heavy duty cutter, Safety glasses


INSTALLATION INSTRUCTIONS

STEP A

The center of one metal track should be 30 1/2 in. (775 mm) from the wall.

And the center of another metal track should be 58 1/2 in. (1486 mm) from the wall.

The two metal tracks should be placed at approximately 1 1/4 in. (30 mm) from the edge of the base to the track center.

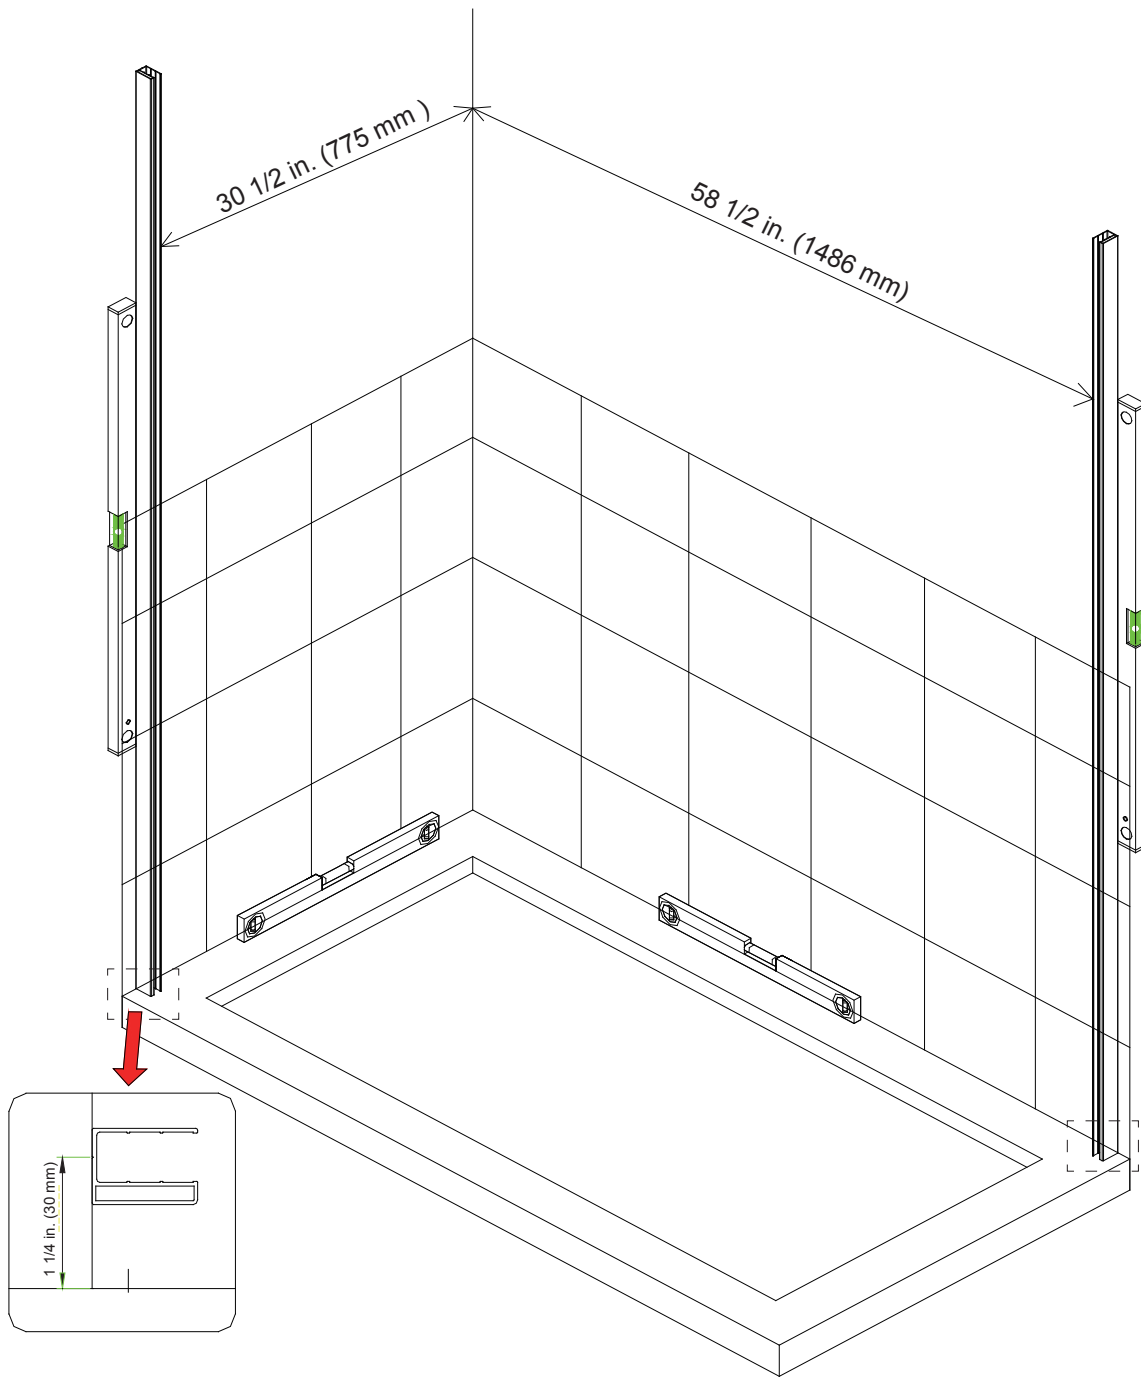


INSTALLATION INSTRUCTIONS

STEP B

It is recommended that a small diameter bit be used when first drilling ceramic tiles to avoid breaking them. Begin with the smaller bit and gradually move to larger drill bits until the proper sized hole is attained.


1. Level the tracks (F) and mark the track holes positions. Temporary removes the frames and ensures that the distance is correct.
2. Drill pilot holes at the marked place. Ensure that the final hole is large enough to fit snugly the wall anchors.
3. Insert the wall anchors (AA) using a rubber mallet (to avoid breaking the tiles) until the anchors are flush with the tile surface. Then screw the track on the wall using BB screws.

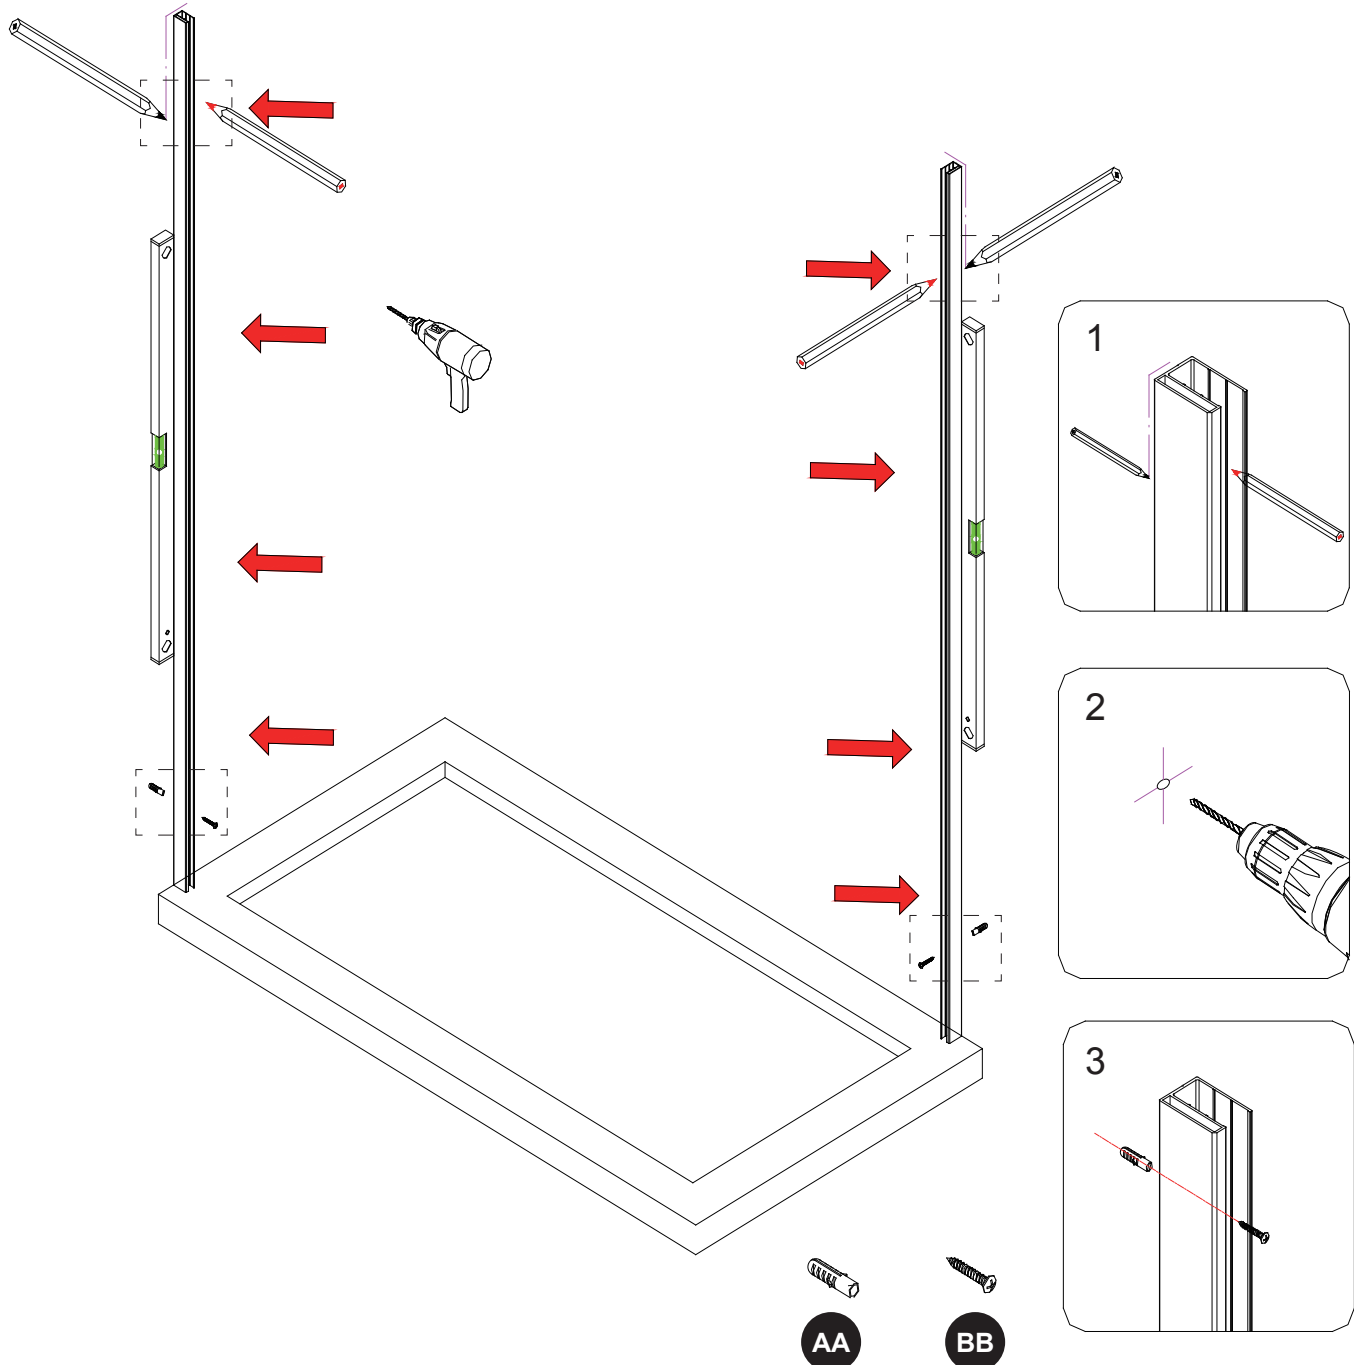

INSTALLATION INSTRUCTIONS


STEP C

1. Place the seal strips (I) at the base of glass panels (C & E) and cut it to size.
2. Place the seal strips (K) at the base of the glass (E) and cut it to size.
3. Insert glass panels (C & E) into the tracks (F). Do not fully tighten hardware as further adjustments may be required.

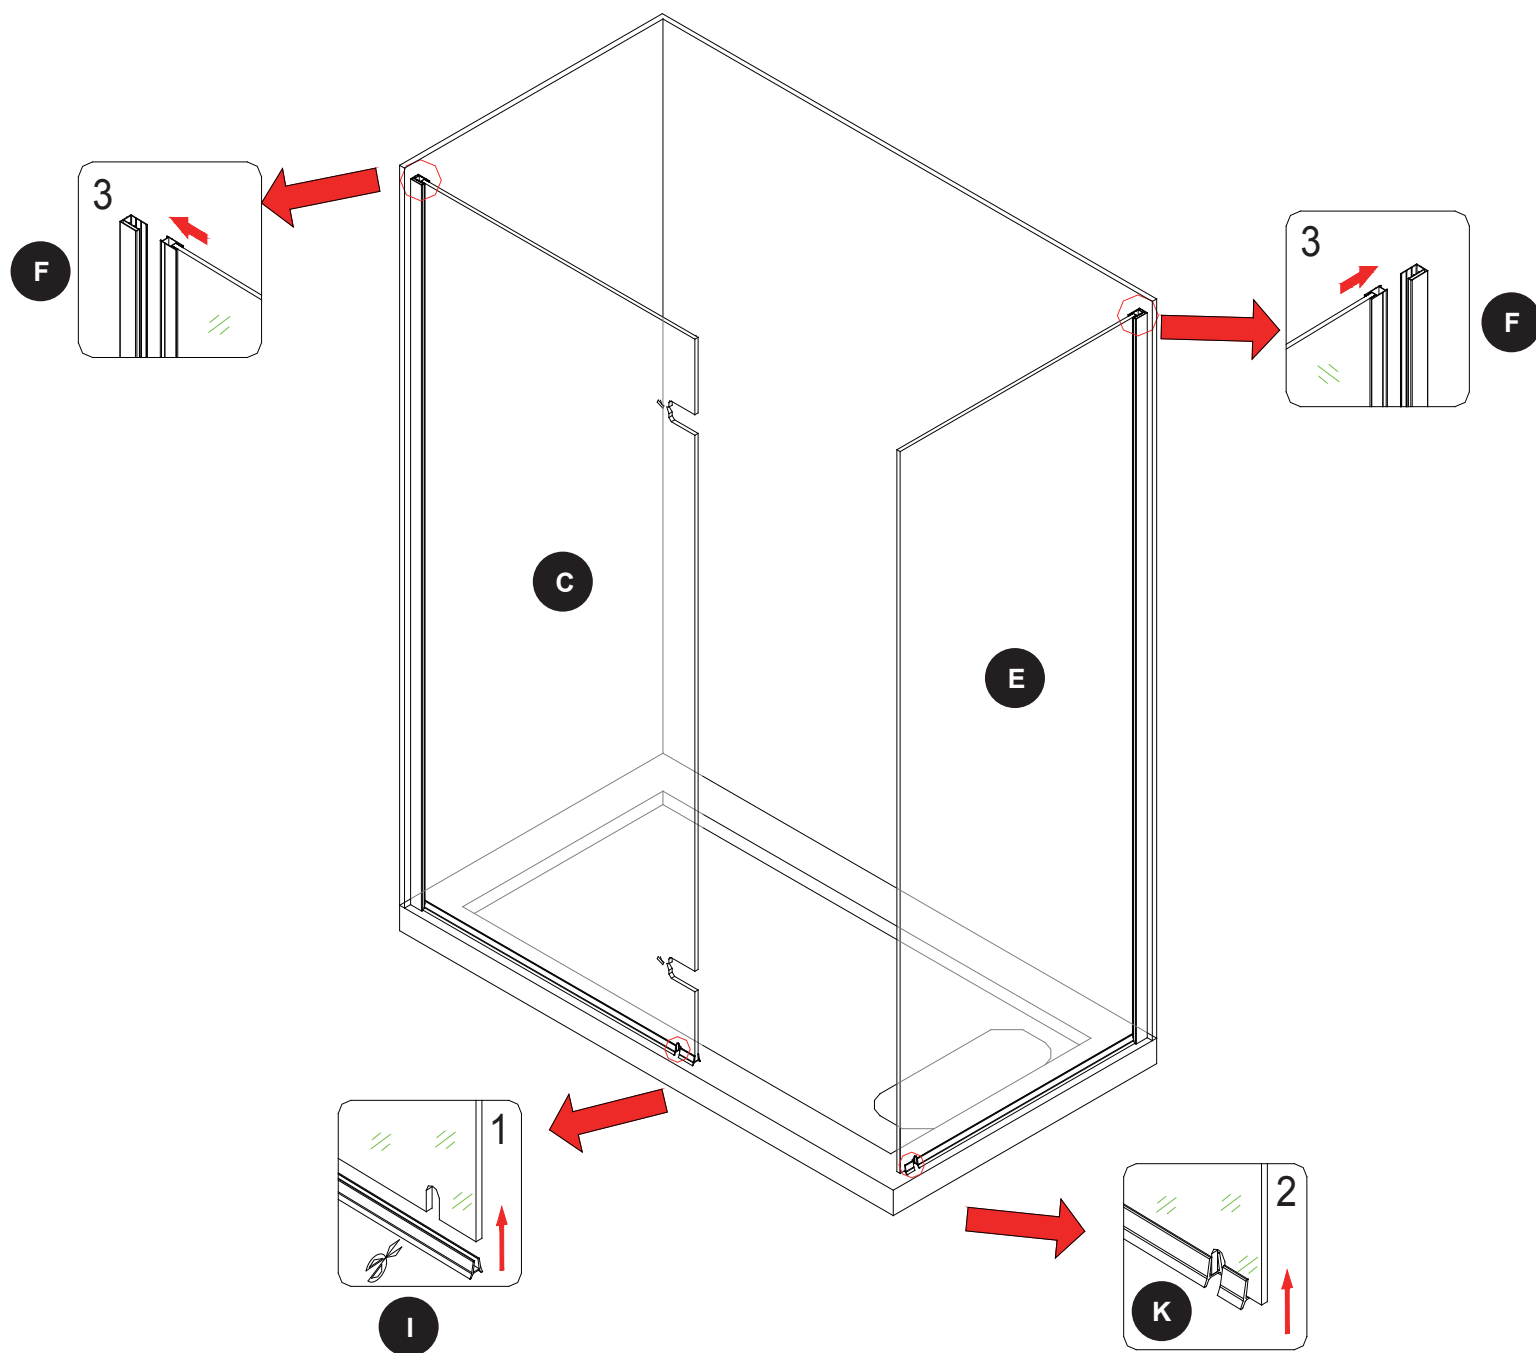







STEP D

1. Using an Allen key (JJ), install the hinges (M) on the glass panel (C) by following the illustration.
Install shower door (D) to the hinges that are on the glass panel.
2. Install the bottom rubber track (J) on the shower door (D) and cut it to size.
The longer lip of the strip must be in the internal side of the shower.
3. Install the PVC magnetic door seals (H) on the edge of shower door and side panel.
4. Assemble the panels (C & E) with the tracks (F) by using the screws (CC) and placing the brass fitting and the decorative caps (DD) as shown in the illustration.

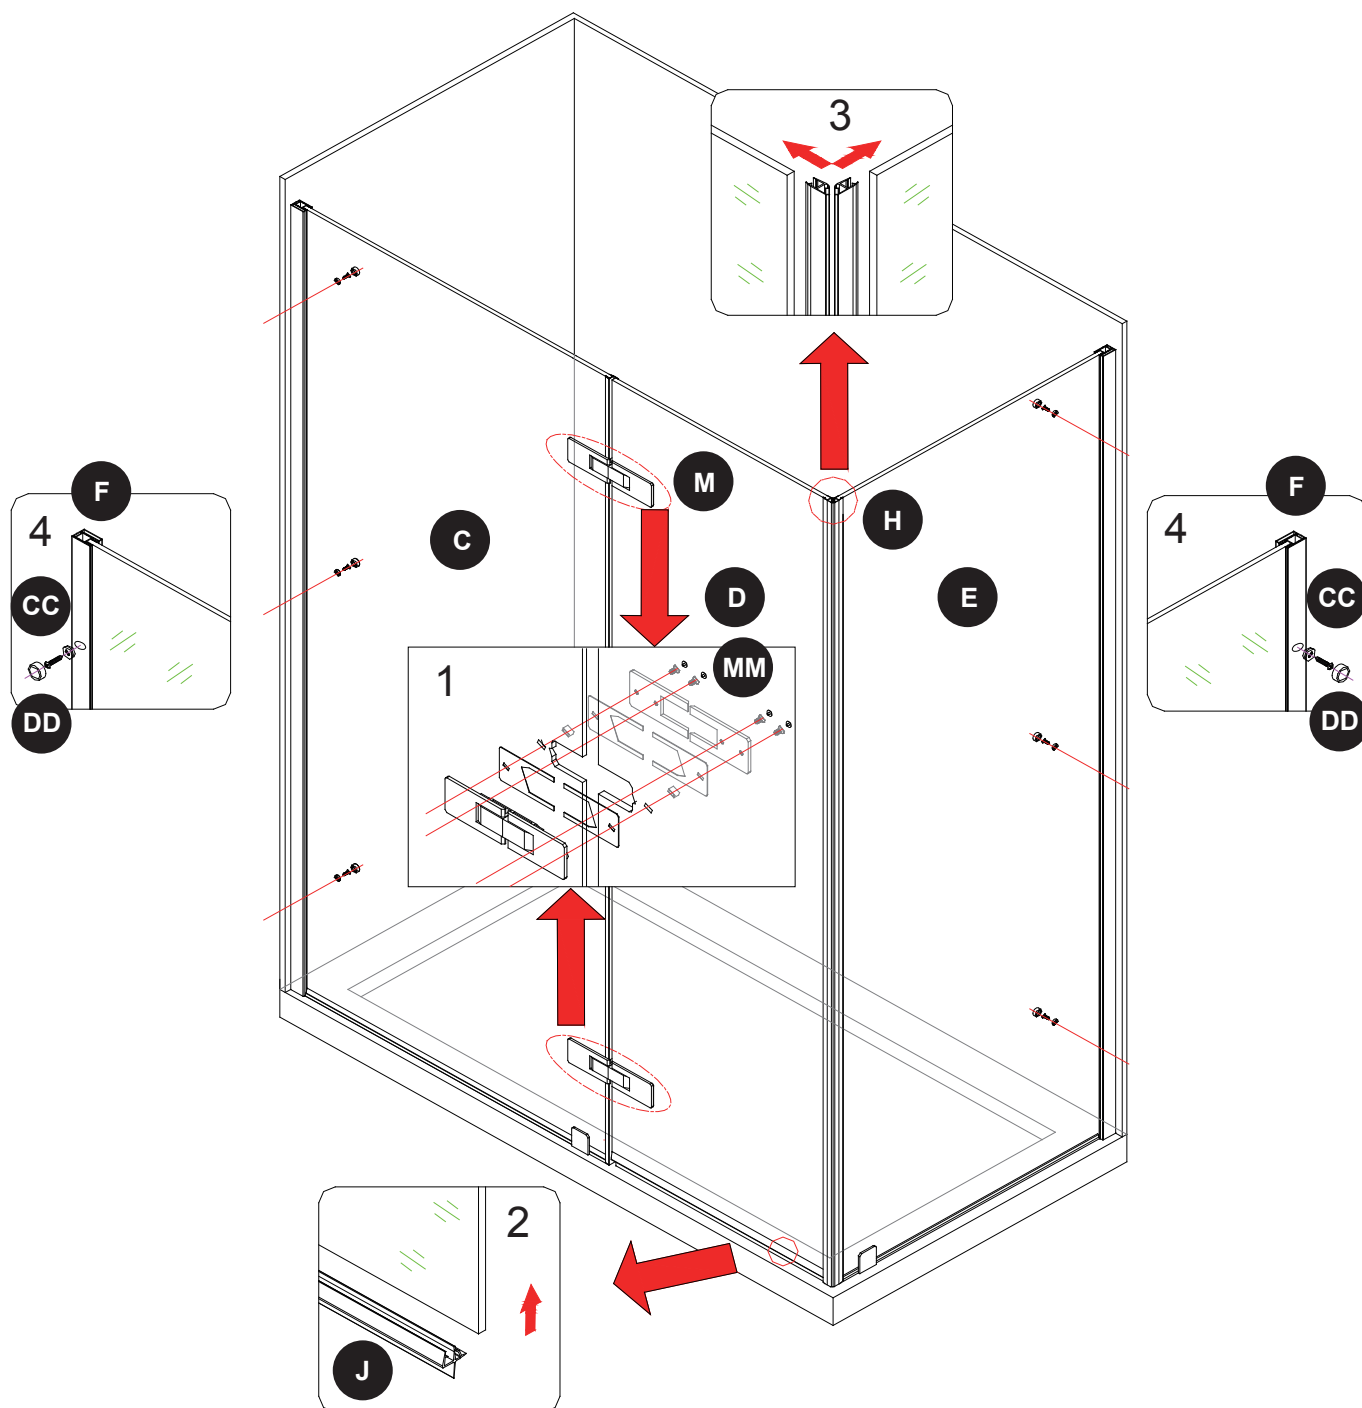

STEP E


1. Using a cutter, remove exposed rubber strips where the glass support brackets (L) are to be installed.
2. Place rear part of bracket (L) and one rubber gasket (FF) centered in the notch as illustrated and mark location of hole to drill on shower base. Remove glass support bracket (L) and rubber gasket (FF). Drill a hole in the shower base using the drill.
3. Add a drop of silicone to the drilled hole; Put back the rear bracket and the rubber seal and tighten using the screw (EE).
4. Place the front bracket and the rubber seal and tighten with fixing screw (GG) using the Allen key (JJ).
5. Cut the vertical rubber track (G) to size and place it on the edge of fixed glass panel.

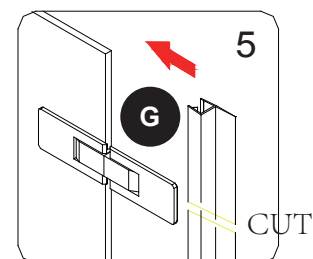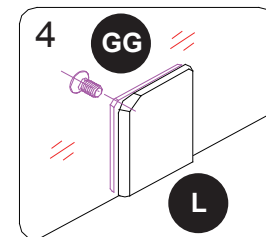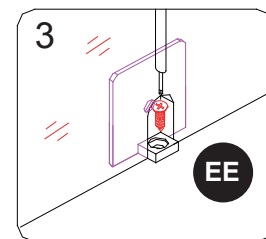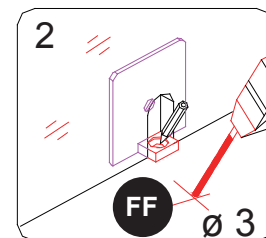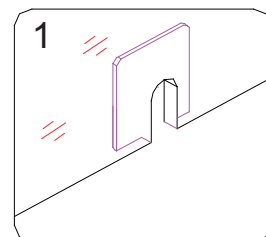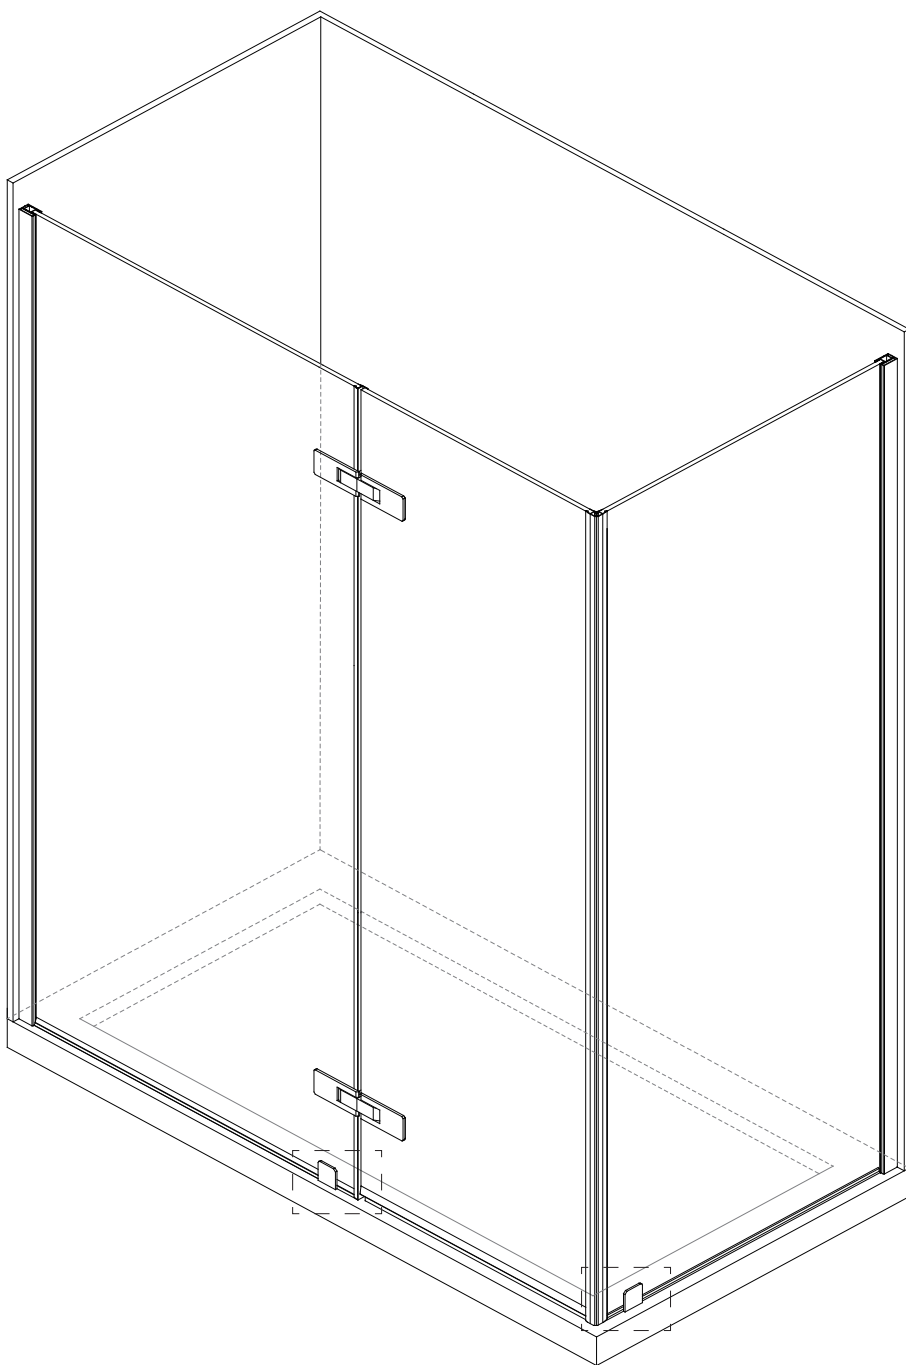

INSTALLATION INSTRUCTIONS

STEP F

- 1 & 2. Inset the glass clips (O & Q) and wall brackets (P) on the support bar (N).
3. Place the support bar on the glass panels (C & E), then adjust the glass clips position on the support bar.
4. Mark the wall bracket (P) positions on the wall.
- 5 & 6. Temporarily remove the support bar from the glass panel.
7. Place the wall bracket (P) on the marked line on the wall, mark the two holes position of the bracket plate.
8. Drill the two holes on the marked place.
9. Insert the wall anchors (AA) then mount the wall bracket plates on the wall using screws (HH).
10. Replace the wall bracket (P) in the support bar,
11. Replace the support bar on the glass panels (C & E) then mount the wall bracket (P) into the bracket plate.
- 12 - 14. Tighten the screws on the wall bracket (P) and the glass clips (O & Q) with glass brackets (II) using an Allen key (KK).

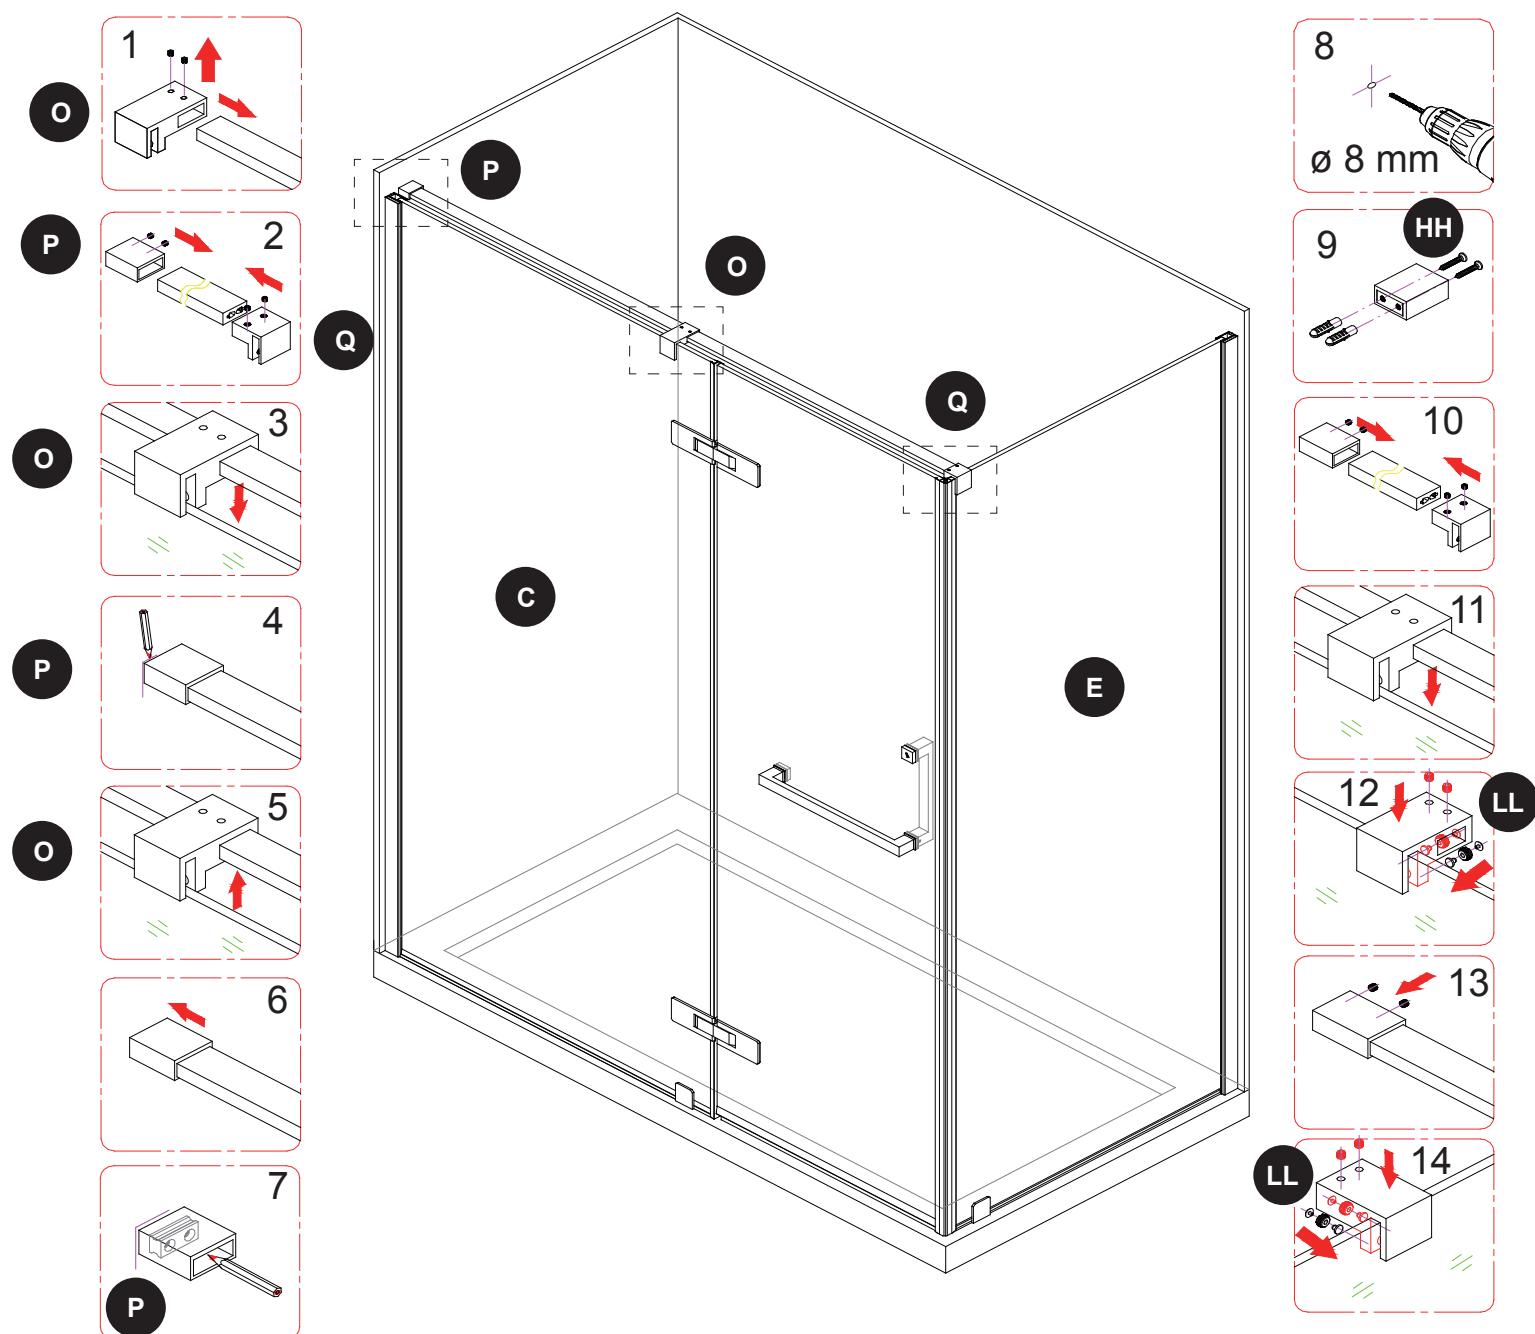


INSTALLATION INSTRUCTIONS

STEP G

1. Disassemble the handle (R & S) using an Allen key. Install the handle (R & S) as shown.
2. Ensure that the door closes tight and opens smoothly, and there is a tight connection between the side glass panel and the frame as well as the support bar.
3. Apply a clear silicone water sealant around the inside and the outside perimeter of any fixed shower components (horizontally between bottom of fixed side glass panel and base, as well as vertically between the wall, glass frames, and any side glass panel).

Allow 24hours for silicone to dry.

Improper application of silicone sealant may cause your shower to leak.

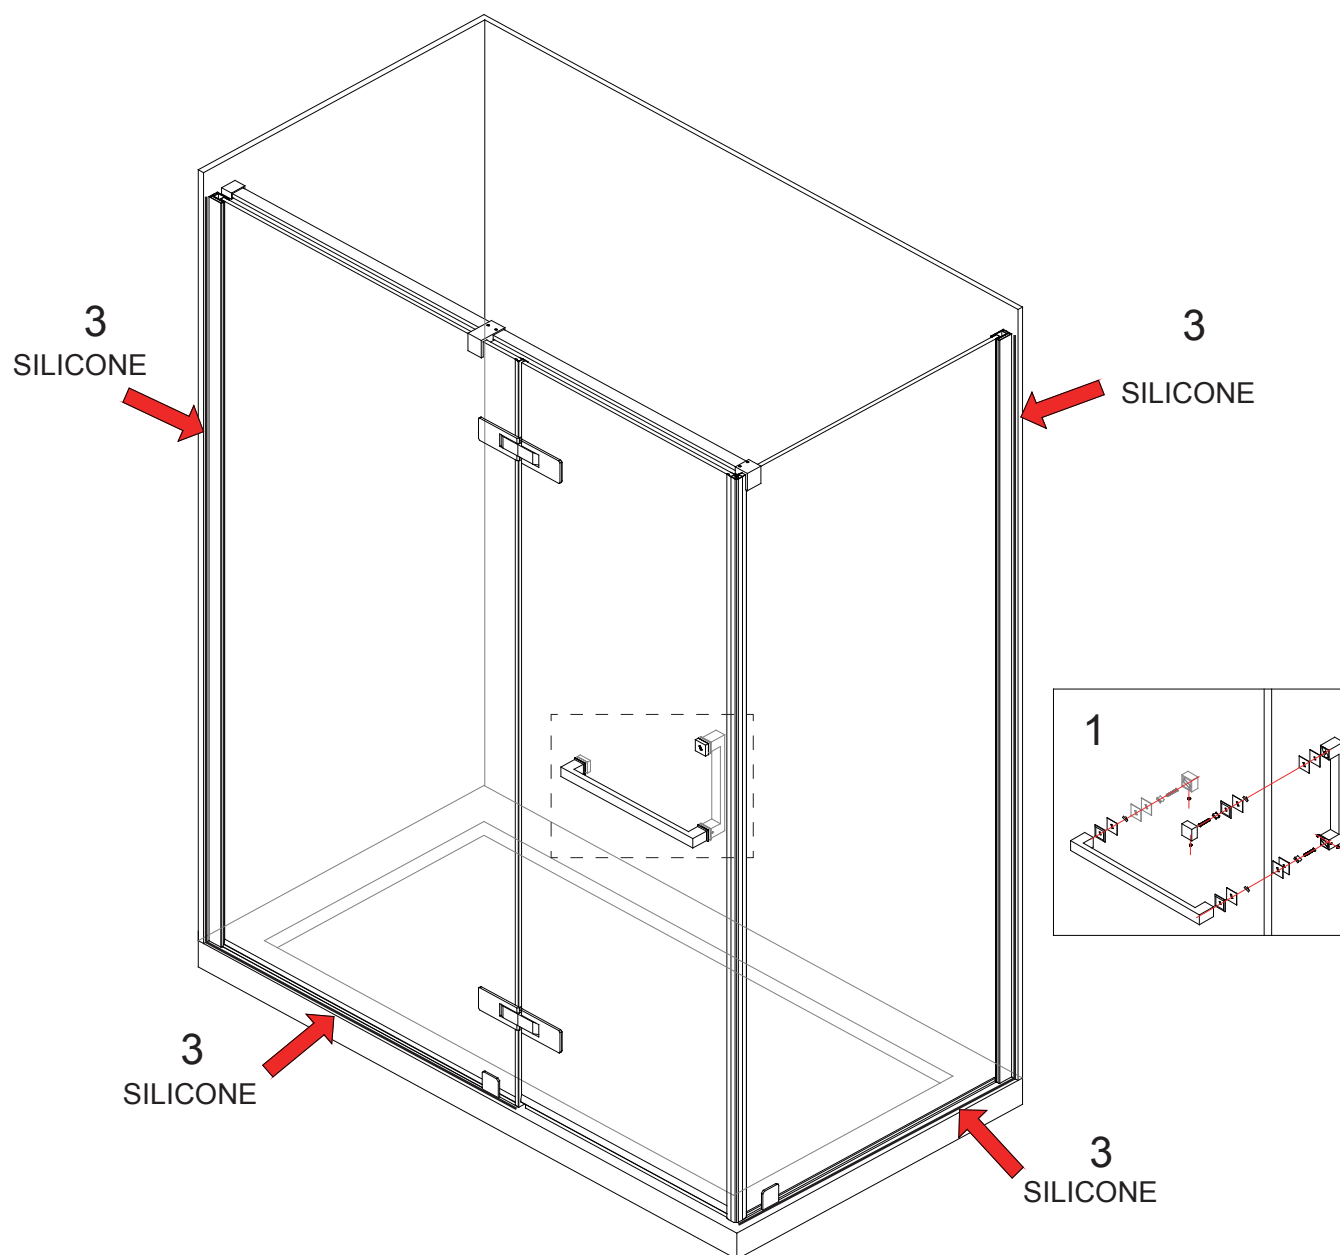

CARE AND MAINTENANCE

For the daily maintenance, use a wet cloth and a soft liquid cleaner.

Never use abrasive cleaners containing some acetone, chlorine or strong bleach, scrapers, metallic brushes, nor other objects or the products which can graze or tarnish surfaces.

LIMITED 5-YEAR WARRANTY

This warranty extends only to the original owner lend-user for personal household use only.

For commercial uses, additional limitations may apply.

Distributor warrants your satisfaction with each shower.

Should any shower not meet your satisfaction due to a visual defect, simply return it to your retailer with the original packaging, PRIOR TO INSTALLATION, for a replacement.

Distributor warrants shower doors to be free from defects in workmanship and materials under normal use and service for a period of five (5) years.

Distributor warrants acrylic surface against blistering or cracking and chipping resulting from defect in the acrylic surface material when used under normal conditions and service for a period of five (5) years from purchase date.

Distributor further warrants the structure of the acrylic shell against loss of water through fiberglass laminate of the acrylic body as a result of defect in materials and workmanship for a period of five (5) years from purchase date.

Distributor warrants, shower hardware (handles, hinges, support clips, metal support bars and wall tracks) to be free from defects in workmanship and materials under normal use and service for a period of one (1) year.

Distributor will, at its election, repair, replace, or make appropriate adjustment where distributor optional inspection discloses any such defects occurring in normal usage within the warrantee periods.

Please note distributor is not responsible for installation or removal costs.

Modification of any shower enclosure components may void the warranty. This warranty does not cover any claim arising from abuse, misuse, negligence, accident, improper installation or operations on the part of the purchaser. This warranty is void if the distributor product is subject to alterations, or if repairs were done to the shower unit.

This warranty does not extend to any plumbing or components installed by dealers, installers or by any party other than distributor.

Implied warranties, including that of merchantability or fitness for a particular purpose, are expressly limited in duration to the duration of this warranty.

Distributor disclaims any liability for special, incidental or consequential damages.